

ATyS C65

ATS Controller

connected functions



ATyS C65

Function

ATyS C65 is an advanced ATSE controller offering all the functions of the ATyS C55 with the addition of current, power & energy monitoring, increased I/O capacity and functions, load shedding, lift control function, energy backup, increased number of events and alarms (measurement and combination alarms) and DIRIS Digiware module compatibility.

Advantages

Fast commissioning

On initial power up, the ATyS C65's smart wizard will guide the operator through the commissioning process.

User customisable

Front face LEDs, Load shedding, Genset schedulers and the lift control signal are just a few of the many customisable features available on ATyS C65.

Intuitive operation

- The high-resolution LCD screen provides several dashboards enabling easy monitoring of all parameters, including power and energy consumption of the loads.
- The integrated energy backup provides transitional power to the product enabling status indication (switch position, timer status, fault notifications) and communication to remain active with no supply present.
- Quick and easy access to main functions through the front face with direct key input.
- Complete configuration can be achieved through the front face or via software (EasyConfig).

General characteristics

- Self-powered from sensing.
- Wide voltage range (88 - 576 VAC).
- 24 VDC aux power supply (for optional use).
- 2 latching relays.
- Digiware IO-10: I/O extension up to 30 inputs and 18 outputs.
- Power & Energy metering with /1 A or /5 A current transformers.
- Energy backup.
- IP65 degree of protection (panel gasket included).
- 3000 Alarms and Events.
- Multiple fully configurable timers, thresholds and I/O.
- Easyconfig configuration software.
- Shock resistant IK08+.
- Digiware compatible (replaces U module).
- Ethernet, SNMP, BACnet using DIRIS M-70 gateway. Includes Webserver.
- A DIRIS Digiware D-70 gateway can be used as a remote display for multiple ATyS C55/C65 controllers; the D-70 also provides Ethernet, SNMP & BACnet connectivity.

The solution for

- Life safety
- Critical applications
- Transfer panels with ACB



Strong points

- Advanced I/O functions
- Power monitoring
- Energy backup

Conformity to standards

- IEC 61010-2-201
- IEC 60947-6-1
- GB/T 14048.11 Annex C



Communication gateways



DIRIS Digiware M-70 & D-70

Compatible with



ATyS r
Transfer Switching
Equipment

Double power supply
DPS Optional for use
with ATyS r, breakers
and contactors without
integrated DPS

References

| Description | Reference |
|--|--------------------------|
| ATyS C65 – ATS controller (includes mounting kits) and IP65 gasket | 1600 0065 |
| DIRIS Digiware M-50 multi-protocol Ethernet gateway | 4829 0221 |
| DIRIS Digiware D-50 multipoint display, Ethernet output | 4829 0204 |
| DIRIS Digiware M-70 communication gateway for Ethernet & Webserver | 4829 0222 |
| DIRIS Digiware D-70 communication gateway for Ethernet & Webserver and multi-product display | 4829 0203 |
| Double power supply - DPS | 1599 4001 |
| ATyS r - Remotely operated Transfer Switching Equipment | 9523 xxxx ⁽¹⁾ |


(1) xxxx variable based on the number of poles and rating.

Front panel



1. Dashboard displays.
2. Navigation keypad.
3. Mimic LED indication.
4. Lamp test button / LED info.
5. AUTO mode select.
6. TEST button.
7. CONTROL mode select.
8. Position orders (only in CONTROL mode).
9. Customisable LED.
10. Hi-res LCD screen.

Dimensions (mm)

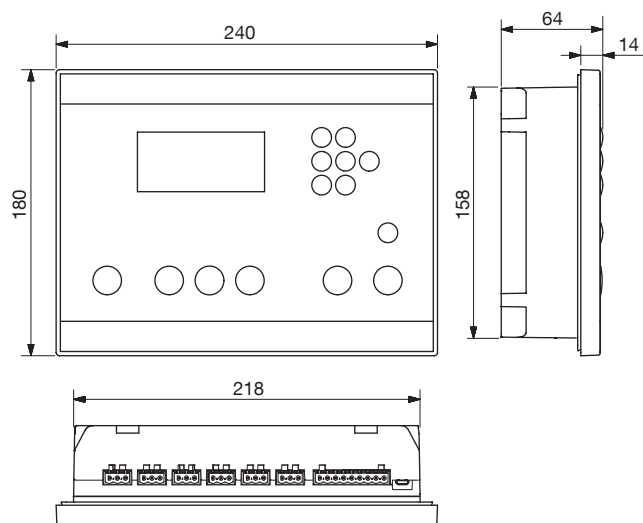


Characteristics

| Electrical characteristics | | Mechanical characteristics | |
|----------------------------|--------------------------------|----------------------------|---------------------------------|
| AC operating limits | 110 - 480 VAC ±20% | Weight | 1080 gr |
| Optional DC supply | 24 VDC | Door cutout | 220 x 160 mm |
| Frequency limits | 45 - 65 Hz | Protection degree | IP65 |
| Power consumption | < 10 W | Operating temperature | -30 ... +70 °C |
| Current transformers | 1 or 5A | Communications | |
| Measurement type | true RMS (TRMS) | Interface type | RS485. 2 to 3 half duplex wires |
| Inputs | 6, fully programmable | Protocol | MODBUS RTU |
| Outputs | 6, fully programmable | Baudrate | programmable 1200 - 115200 bps |
| Output relays | 8 A AC15 | Digiware bus | RJ45 cable |
| I/O Extension (IO10) | up to 30 inputs and 18 outputs | Display | |
| EMC classification | class A and B | Screen resolution | 350 x 160 pixels |
| Impulse withstand | 8/6 kV ⁽¹⁾ | Event recorder | 3000 events |
| Overvoltage category | CAT 3 | Energy backup | up to 30 seconds |

(1) 8 kV tested between phases of a different source and 6 kV tested between phases of a the same source.

Terminals

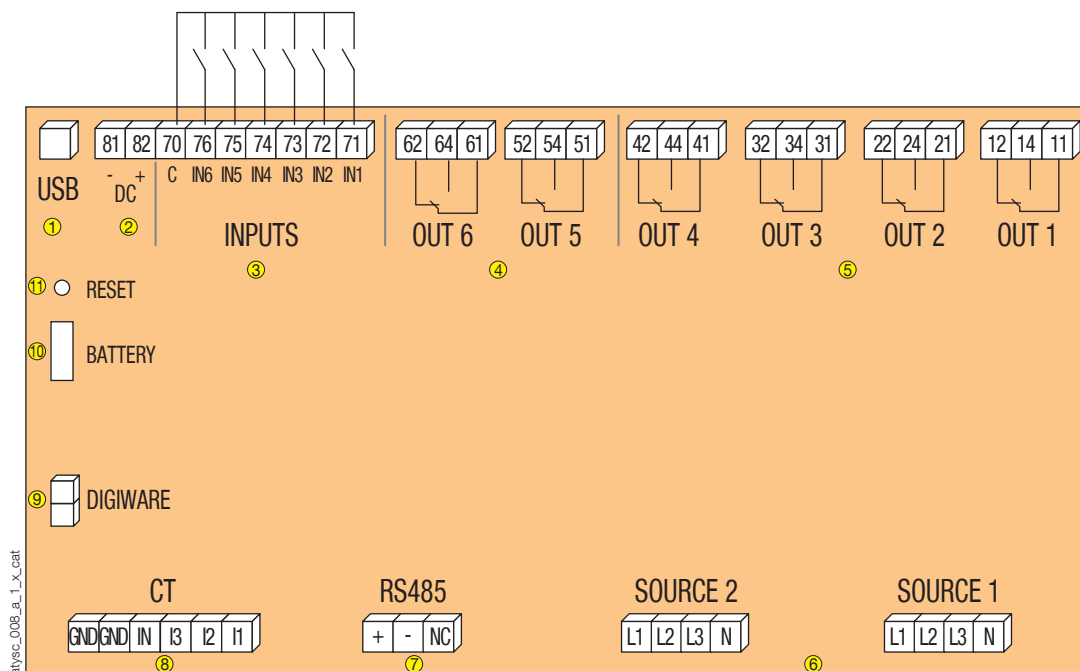

1. Configuration USB
2. 24 VDC aux power supply (for optional use)
3. 6 x inputs
4. 2 x latching relay outputs
5. 4 x relay outputs
6. Source sensing (110 - 480 ±20%)
7. RS485 communication
8. Current transformers (1 or 5 A)
9. Digiware RJ45 connectors
10. Replaceable RTC battery
11. Hard reset button